

TCP3

AUTHENTICATION / RELEASE STATION



**TCP3 authentication / release station
top view**

ELATEC RFID readers enable organizations to extend the use of their employee identification badge to authenticate for applications beyond physical access. This includes most multi-function printers and some single-function printers. Unfortunately, not all printers and devices have support for the direct connection of a USB proximity card reader, such as those with no USB port. In these situations, the ELATEC TCP3 authentication / release station extends ID card-based capabilities such as authentication and pull printing to any printing device regardless of the manufacturer, make or model.

The main purpose of the TCP converters is to enable RFID authentication and access control for devices that lack a USB port, from older single-function printers to industrial robotics. They can be connected on one end to a Local Area Network (LAN) and on the other end to an RFID reader via USB cable. When the user presents a card to the reader, the information is sent over the network to a local server and depending on the response, a print job can be released or, in the example of industrial robotics, operator authorization granted.

Special features:

- + Can act as an Ethernet network router
- + Enables user authentication and access control for devices that lack a USB port
- + Minimizes IT support costs associated with additional IP or MAC addresses
- + Allows simultaneous communication of print data and printer status at gigabit speeds
- + Configuration can be saved for later usage on other TCP3s thus saving expensive man hours
- + Optionally available with Power-over-Ethernet as the source of power
- + Supports USB 3.0 and gigabit Ethernet networks
- + Can be used to control access to devices which require special operator training and certification



Elevator



EV Chargers



Access



Shop POS



Fitness
Equipment



Ticket POS



PC Log-on



Document
Management



Driver ID



Vending



Parking



Gaming



Locker Locks



Time
Attendance



Industrial
PC

TECHNICAL DATA

| | |
|-----------------------------|--|
| HOUSING | ABS UL94-V0 |
| DIMENSIONS (L X W X H) | 105.8 x 92.6 x 35.6 mm / 4.17 x 3.64 x 1.40 inch |
| POWER | External power supply 5 V or internal Power over Ethernet Limited power source according to the safety norms listed in the respective declaration of conformity, short-circuit current < 8 A |
| CURRENT CONSUMPTION | Max. 3 A depending on external load |
| TEMPERATURE RANGE | Operating: 0 °C to +45 °C (32 °F to 113 °F) Storage: -40 °C up to +85 °C (-40 °F up to +185 °F) |
| RELATIVE HUMIDITY | 10% to 90% non-condensing |
| NETWORK | 10 Mbit/s, 100 Mbit/s, 1000 Mbit/s converter to Host or converter to Device 500 Mbit/s between Host & Device, upgradable to 1.2 Gbit/s at additional cost Host: DHCP, Static IP; Device: DHCP, Static IP |
| OPERATING MODES | TCP Server: Device is connected by a TCP client. TCP Client: Device connects automatically to a specified TCP server. Connection may be triggered by incoming flow of data on either USB port. For additional security the connection can be optionally SSL encrypted. Data can be sent via UDP or HTTPS via JSON. |
| LAN COMMUNICATION PROTOCOLS | TCP, UDP, HTTP, HTTPS, IPV4, DHCP, SSL/TSL1.2, Syslog |
| USB | Two USB 3.0 Host ports Maximum current: 1.6 A, shared between the two USB ports Supported devices: ELATEC TWN3 or TWN4 readers/writers, many magnetic stripe readers, many optical bar code readers and PIN pads via HID keyboard or CDC |
| OPTICALLY ISOLATED I/O | Two optically isolated outputs and one optically isolated input traditionally used to support Foreign Device Interface or Internet of Things |
| CONNECTORS | Ethernet: 2 x RJ45, 10/100/1000BaseT. Host connector supports PoE USB: 2 x USB-A receptacle 8-pin connector for optically isolated signals Power: for plug 5.5 mm/2.1 mm |
| LED INDICATORS | 4 LEDs which use multi-color to indicate Power, Ready, Busy and Status |
| MEMORY | RAM: 2 GB Flash: 8 GB SDHC Expansion: up to 2 TB |
| MTBF | 500,000 hours |
| WEIGHT | Approx. 270 g / 9.5 oz |
| CERTIFICATION NAME | TCP3 TCP3 POE |
| CERTIFICATION(S) | CE, FCC, IC, REACH and RoHS-III, and many more* |
| ORDER CODE(S) | TC3K-BT5EU: TCP3 Kit with 0.5 m patch cable (RJ45) and power supply EU** TC3K-BT5JP: TCP3 Kit with 0.5 m patch cable (RJ45) and power supply JP** TC3K-BT5UK: TCP3 Kit with 0.5 m patch cable (RJ45) and power supply UK** TC3K-BT5US: TCP3 Kit with 0.5 m patch cable (RJ45) and power supply US** TC3K-BT5E1: TCP3 Kit with 0.5 m patch cable (RJ45) and Power over Ethernet |


* More information on request.

** Please also refer to the power supplies data sheet(s).

ACCESSORIES

| | | |
|----------|---------|----------------------------|
| CABLE(S) | CAB-J7: | Cable, TCP3, white, 100 cm |
|----------|---------|----------------------------|

DRAWING

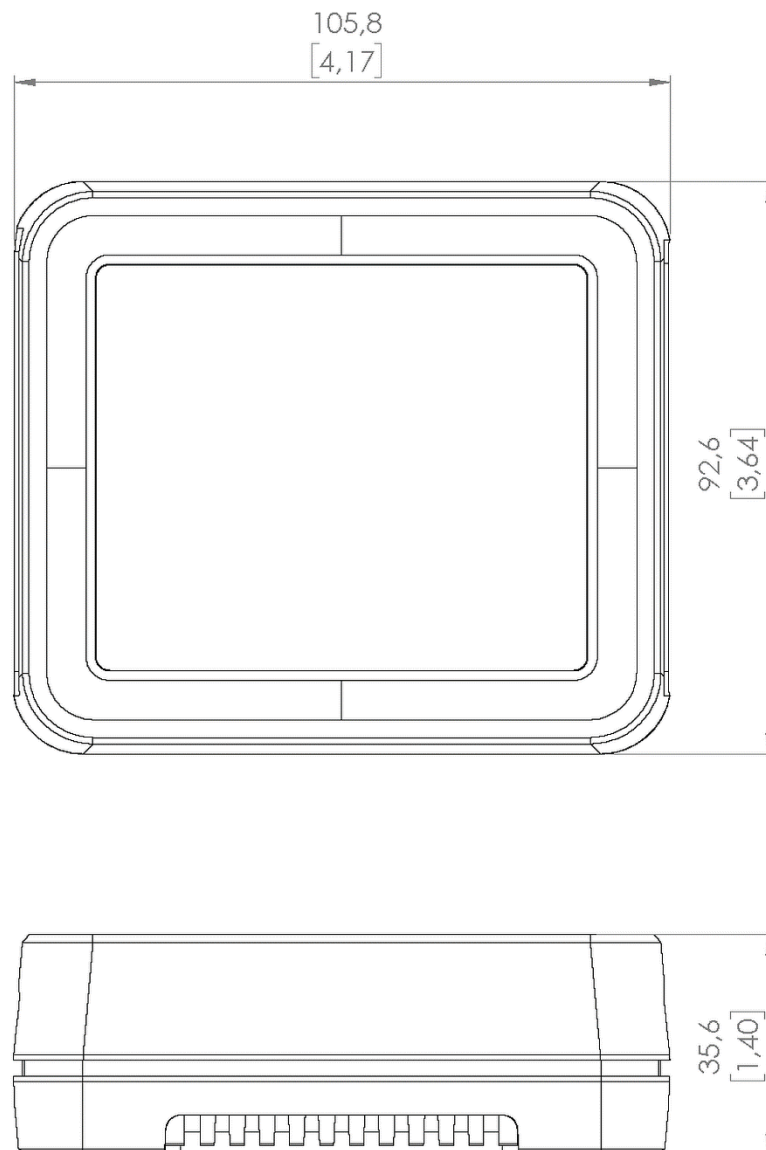

All dimensions in mm [inch]

ELATEC GmbH

Zeppelinstr. 1
82178 Puchheim
Germany
P +49 89 552 9961 0
F +49 89 552 9961 129
E-Mail: info-rfid@elatec.com
Website: elatec.com

ELATEC Systems GmbH

Schwieberdinger Str. 44
71636 Ludwigsburg
Germany
P +49 7141 309736 0
E-Mail: info-rfid@elatec.com
Website: elatec.com

ELATEC Inc.

1995 SW Martin Hwy
Palm City • FL 34990
USA
P +1 772 210 2263
F +1 772 382 3749
E-Mail: americas-info@elatec.com
Website: elatec.com

ELATEC Technology (Shenzhen) LLC

918, Main Building, Tian An Cyber Times
Tower, No. 6, Tairan Fourth Road, Tian 'an
Community, Shatou Neighborhood
Futian District • Shenzhen • China
P/F +86 755 2394 6014
E-Mail: apac-info@elatec.com
Website: elatec.com

ELATEC reserves the right to change any information or data in this document without prior notice. ELATEC declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.