

TWN4 MULTITECH 3 M LEGIC

PROGRAMMABLE RFID READER/WRITER FOR LF, HF, NFC



TWN4 MultiTech 3 M LEGIC
PCB top view*



TWN4 MultiTech 3 M LEGIC
PCB bottom view*

*Product images may show product variants or additional components that are not available.

The TWN4 MultiTech 3 M LEGIC integrates RFID (125 kHz and 13.56 MHz) and NFC capabilities into a compact but powerful reader. Its reduced size combined with optimized read/write performance makes it the perfect reader for all applications where small size and full performance matters, e.g. print solutions, healthcare applications, driver identification, POS integration and much more. Furthermore, the TWN4 MultiTech 3 M LEGIC provides access to most common host interfaces such as USB, serial (TTL) or I²C which are readily accessible through an on-board connector.

The TWN4 MultiTech 3 M LEGIC allows users to read and write almost all common worldwide 125 kHz and 13.56 MHz tags and/or labels. It supports all major transponders from various suppliers like ATMEL, EM, ST, NXP, TI, HID etc. and ISO standards like LEGIC Advant, LEGIC Prime, ISO14443A/B (T=CL), ISO15693, ISO18092 / ECMA-340 (NFC).

Special features:

- + Powerful SDK for writing apps which are executed directly on the reader
- + Firmware update in the field possible
- + On-board 18 kB flash storage, e.g. for storing user accessible non-volatile data
- + Direct chip-commands support
- + One on-board SAM socket (Secure Access Module)
- + CCID and PC/SC 2.01
- + 3 GPIOs
- + Supports quick (re)configuration over network and over wireless interface with TWN4 CONFIG Card
- + TWN4 Upgrade Card for P option available on request
- + 3D construction data (STEP) available on request



Elevator



EV Chargers



Access



Shop POS



Fitness
Equipment



Ticket POS



PC Log-on



Document
Management



Driver ID



Vending



Parking



Gaming



Locker Locks



Time
Attendance



Industrial
PC

TECHNICAL DATA

FREQUENCY	125 kHz (LF) / 13.56 MHz (HF)
ANTENNA	Integrated
DIMENSIONS (L X W X H)	50 mm x 35 mm x 7 mm, maximum diameter < 55 mm / 1.97 inch x 1.38 inch x 0.28 inch, maximum diameter < 2.17 inch
POWER SUPPLY	4.3 V - 5.5 V via micro USB; via generic interface (X2) 3.3 V +/- 5% Limited power source according to IEC 60950-1 or PS2 classified IEC 62368-1, short-circuit current < 8 A
CURRENT CONSUMPTION	RF field on: 200 mA typically / Sleep: 500 µA typ.
TEMPERATURE RANGE	Operating: -25 °C up to +80 °C (-13 °F up to +176 °F) Storage: -45 °C up to +85 °C (-49 °F up to +185 °F)
RELATIVE HUMIDITY	5% to 95% non-condensing
READ- / WRITE DISTANCE	LF and HF: Up to 100 mm / 4 inch, depending on environment and transponder
OPERATING MODES (USB)	USB keyboard emulation – USB virtual COM port – CCID / PC/SC 2.01
MTBF	500,000 hours
WEIGHT	Approx. 9 g (0.32 oz)
COMPATIBLE PIN HEADER	PTT-112-01-L-D or TMM-112-03-F-D by Samtec
SUPPORTED TRANSPONDERS (STANDARD) 13.56 MHZ	<p><u>ISO14443A:</u> LEGIC Advant, MIFARE Classic EV1¹⁾, MIFARE Classic, MIFARE Mini, MIFARE DESFire EV1, MIFARE DESFire EV2²⁾, MIFARE DESFire Light²⁾, MIFARE Plus S, X, MIFARE Pro X³⁾, MIFARE Smart MX³⁾, MIFARE Ultralight, MIFARE Ultralight C, MIFARE Ultralight EV1¹⁾, NTAG2xx, PayPass³⁾, SLE44R35³⁾, SLE66Rxx (my-d move)³⁾</p> <p><u>ISO14443B:</u> Calypso³⁾, CEPAS³⁾, HID iCLASS⁴⁾, Moneo³⁾, Pico Pass⁴⁾</p> <p><u>ISO18092 ECMA-340:</u> NFC Forum Tag 1-5⁵⁾, Sony FeliCa⁶⁾, NFC Active and passive communication mode</p> <p><u>ISO15693:</u> EM4x33³⁾, EM4x35³⁾, HID iCLASS⁴⁾, HID iCLASS SE/SR⁴⁾, ICODE SLI, LEGIC Advant, M24LR16/64, SRF55Vxx (my-d vicinity)³⁾, Tag-it, PicoPass⁴⁾</p> <p><u>LEGIC Prime:</u> LEGIC Prime</p>
SUPPORTED TRANSPONDERS (STANDARD) 125 KHZ ⁷⁾	AWID, Cardax, CASI-RUSCO, Deister ⁸⁾ , EM4100, 4102, 4200 ⁹⁾ , EM4050, 4150, 4450, 4550, EM4305 ¹⁰⁾ , FDX-B ¹⁰⁾ , EM4105 ¹⁰⁾ , HITAG 1 ¹¹⁾ , HITAG 2 ¹¹⁾ , HITAG S ¹¹⁾ , ICT ¹⁰⁾ , IDTECK, Isonas, Keri, Miro, Nedap ⁸⁾ , PAC ¹⁰⁾ , Pyramid, Q5, T5557, T5567, T5577, TIRIS/HDX ¹⁰⁾ , TITAN (EM4050), UNIQUE, ZODIAC
SUPPORTED TRANSPONDERS (OPTION P)	All Standard Transponders, Cotag, G-Prox ⁸⁾ , HID DuoProx II, HID ISO Prox II, HID Micro Prox, HID ProxKey III, HID Prox, HID Prox II, Indala, ioProx, Nexwatch
OS SUPPORT	Windows XP, Vista, Embedded CE ¹⁰⁾ , 7 (32-/64-bit), 8, 8.1, 10, Linux, Android ¹⁰⁾ , iOS ¹⁰⁾ , MAC OS X ¹⁰⁾
PERIPHERAL INTERFACES	USB, RS-232, TTL serial (logic level 3.3 V, CMOS, 5 V tolerant), I ² C, SPI, 3 GPIOs, Clock/Data, Wiegand
TRANSMISSION SPEED	Host: USB Full speed (12 Mbit/s), RS-232: up to 115.200 baud, HF Air: up to 848 kbit/s
CERTIFICATION NAME	TWN4 MultiTech 3 M LEGIC
CERTIFICATION(S)	CE/RED, FCC, IC, REACH and RoHS-III compliant
ORDER CODE(S)	T430-B6C0 OEM Board T430-B6C0-P OEM Board Option P


¹⁾r/w enhanced security features on request ²⁾In preparation ³⁾r/w in direct chip command mode ⁴⁾UID only ⁵⁾NFC Forum Tag 1 not supported ⁶⁾UID + r/w public area ⁷⁾125 kHz technology requires a Russian local test and import license from the ministry of Trade and Industry (MINPROMTORC). This license has to be in place before Elatec can accept any order to be shipped to Russia ⁸⁾Hash value only ⁹⁾Only emulation of 4100, 4102 ¹⁰⁾On request ¹¹⁾Without encryption

ACCESSORIES


CABLES	CAB-BS1:	Cable, Slim CC, Micro USB/Mini USB male bent, 10cm / 3.93 inch
	CAB-BS2:	Cable, Slim CC, Micro USB/Mini USB female, 10cm / 3.93 inch
	CAB-BS3:	Cable, Slim CC, Micro USB/USB A male, 12cm / 4.72 inch
	CAB-BS4:	Cable, Slim CC, Micro USB/USB A male, 45cm / 17.7 inch
	CAB-BS5:	Cable, Slim CC, Micro USB/USB A male, 120cm / 47.2 inch
	CAB-BS6:	Cable, Slim CC, Micro USB/USB A male, 200cm / 72.74 inch
	CAB-BS7:	Cable, Slim CC, Micro USB/Mini USB male, 60cm / 23.62 inch

DRAWING / CONNECTOR ASSIGNMENT

Dimensions Top

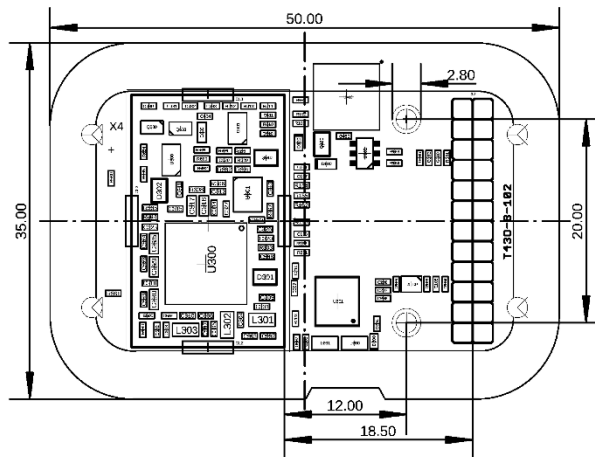

Dimensions Bottom

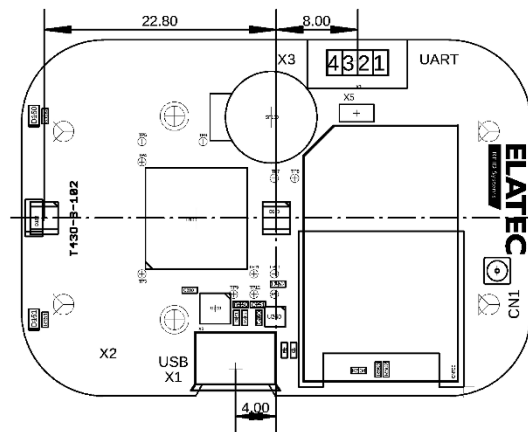

ELATEC GmbH

Zeppelinstr. 1
82178 Puchheim • Germany
P +49 89 552 9961 0 • F +49 89 552 9961 129
E-Mail: info-rfid@elatec.com
Website: elatec.com

ELATEC Inc.

4203 SW High Meadows Ave
Palm City • FL 34990 • USA
P +1 772 210 2263 • F +1 772 382 3749
E-Mail: americas-info@elatec.com
Website: elatec.com

ELATEC Technology (Shenzhen) LLC

No. 716 Industrial Bank Tower
Futian District • Shenzhen • China
P/F +86 755 2394 6014
E-Mail: apac-info@elatec.com
Website: elatec.com

ELATEC reserves the right to change any information or data in this document without prior notice. ELATEC declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.