


TWN4 MULTITECH HF MINI

TWN4 MINI READER MIFARE NFC

COMPACT PROGRAMMABLE RFID/NFC READER/WRITER



TWN4 MultiTech HF Mini
Top view

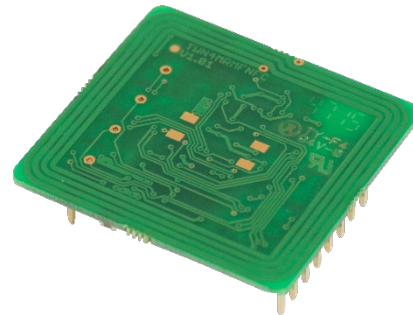

TWN4 MultiTech HF Mini
Bottom view

Elatec's TWN4 MultiTech HF Mini reader is designed for integration into machines, handheld computers or any other human interface devices such as displays, panels, etc. The focus has especially been set on size, flexibility and price. Thanks to its compact dimensions, integration directly on a PC board is possible.

The TWN4 Simple Protocol enables quick software development cycles. All host communication is done via USB or asynchronous serial CMOS/TTL interface. The module offers positions for placement of two LEDs that can be controlled by software.

An external Secure Access Module (SAM) is supported for enhanced security and cryptographic performance. This enables the application to perform secure transactions.

Special features:

- + Powerful SDK for writing apps which are executed directly on the reader
- + Firmware update in the field possible
- + Direct chip-commands support
- + Operating voltage: 3.15 V – 5.5 V DC
- + Compact design (33 x 30 x 11 mm)
- + Integrated antenna
- + 4 GPIOs
- + Industrial operating temperature: -25 °C to +80 °C
- + Pin compatible upgrade from Mini Reader T3MR-F
- + Firmware based on versatile TWN4 technology
- + Supports quick (re)configuration over network and over wireless interface with TWN4 CONFIG Card
- + TWN4 Upgrade Card for I option available on request
- + 3D construction data (STEP) available on request



Elevator



EV Chargers



Access



Shop POS



Fitness
Equipment



Ticket POS



PC Log-on



Document
Management



Driver ID



Vending



Parking



Gaming



Locker Locks



Time
Attendance



Industrial
PC


TECHNICAL DATA

FREQUENCY	13.56 MHz (HF)										
ANTENNA	Integrated										
DIMENSIONS (L X W X H)	32.6 mm x 30.1 mm x 11.2 mm / 1.28 inch x 1.19 inch x 0.44 inch										
POWER SUPPLY	3.15 V - 5.5 V DC Limited power source according to IEC 60950-1 or PS2 classified IEC 62368-1, short-circuit current < 8 A										
CURRENT CONSUMPTION	RF field on: 110 mA typically										
TEMPERATURE RANGE	Operating: -25 °C up to +80 °C (-13 °F up to +176 °F) Storage: -45 °C up to +85 °C (-49 °F up to +185 °F)										
RELATIVE HUMIDITY	5% to 95% non-condensing										
READ- / WRITE DISTANCE	Up to 70 mm / 2.75 inch, depending on environment and transponder										
OPERATING MODES (USB)	USB keyboard emulation – USB virtual COM port – CCID / PC/SC 2.01										
MTBF	500,000 hours										
WEIGHT	Approx. 4 g										
SUPPORTED TRANSPONDERS (STANDARD) 13.56 MHZ	<p><u>ISO14443A:</u> LEGIC Advant¹⁾, MIFARE Classic EV1²⁾, MIFARE Classic, MIFARE Mini, MIFARE DESFire EV1, MIFARE DESFire EV2³⁾, MIFARE DESFire Light³⁾, MIFARE Plus S, X, MIFARE Pro X⁴⁾, MIFARE Smart MX⁴⁾, MIFARE Ultralight, MIFARE Ultralight C, MIFARE Ultralight EV1²⁾, NTAG2xx, PayPass⁴⁾, SLE44R35⁴⁾, SLE66Rxx (my-d move)⁴⁾, Topaz</p> <p><u>ISO14443B:</u> Calypso⁴⁾, Calypso Innovatron protocol⁴⁾, CEPAS⁴⁾, HID iCLASS¹⁾, Moneo⁴⁾, Pico Pass⁵⁾, SRI4K, SRIX4K, SRI512, SRT512</p> <p><u>ISO18092 ECMA-340:</u> NFC Forum Tag 1-5, NFC Peer-to-Peer, Sony FeliCa⁶⁾, NFC Active and passive communication mode</p> <p><u>ISO15693:</u> EM4x33⁴⁾, EM4x35⁴⁾, HID iCLASS¹⁾, HID iCLASS SE/SR¹⁾, ICODE SLI, LEGIC Advant¹⁾, M24LR16/64, SRF55Vxx (my-d vicinity)⁴⁾, Tag-it, PicoPass⁵⁾</p>										
SUPPORTED TRANSPONDERS (OPTION I)	Requires TWN4 SIO Card, All Standard Transponders, HID iCLASS, HID iCLASS SE/SR/Elite, HID iCLASS SEOS (CSN & Facility Code/PAC) ⁷⁾										
OS SUPPORT	Windows XP, Vista, 7 (32-/64-bit), 8, 8.1, 10, Linux, MAC OS X ⁸⁾										
PERIPHERAL INTERFACES	USB, TTL serial (logic level 3.3 V, CMOS, 5 V tolerant), SPI ⁸⁾ , 4 GPIOs, Clock/Data, Wiegand										
TRANSMISSION SPEED	Host: USB Full speed (12 Mbit/s), Serial TTL: up to 115.200 baud, Air: up to 848 kbit/s										
CERTIFICATION NAME	TWN4 Mini Reader MIFARE NFC										
CERTIFICATION(S)	CE/RED, FCC, IC, REACH and RoHS-III compliant										
ORDER CODE(S)	<table> <tr> <td>T4MK-F, including T4MR-F</td> <td>Development Board</td> </tr> <tr> <td>T4MR-F</td> <td>OEM Board (TTL serial)</td> </tr> <tr> <td>T4MR-F-U</td> <td>OEM Board (USB)</td> </tr> <tr> <td>T4MR-F-I</td> <td>OEM Board (TTL serial) Option I</td> </tr> <tr> <td>T4MR-F-UCCID</td> <td>OEM Board (USB CCID) Option I</td> </tr> </table>	T4MK-F, including T4MR-F	Development Board	T4MR-F	OEM Board (TTL serial)	T4MR-F-U	OEM Board (USB)	T4MR-F-I	OEM Board (TTL serial) Option I	T4MR-F-UCCID	OEM Board (USB CCID) Option I
T4MK-F, including T4MR-F	Development Board										
T4MR-F	OEM Board (TTL serial)										
T4MR-F-U	OEM Board (USB)										
T4MR-F-I	OEM Board (TTL serial) Option I										
T4MR-F-UCCID	OEM Board (USB CCID) Option I										

¹⁾UID only ²⁾r/w enhanced security features on request ³⁾In preparation ⁴⁾r/w in direct chip command mode ⁵⁾UID only, read/write on request ⁶⁾UID + r/w public area

⁷⁾UID + PAC (CSN & Facility Code), r/w on request ⁸⁾On request

DRAWING (COMPONENT SIDE)

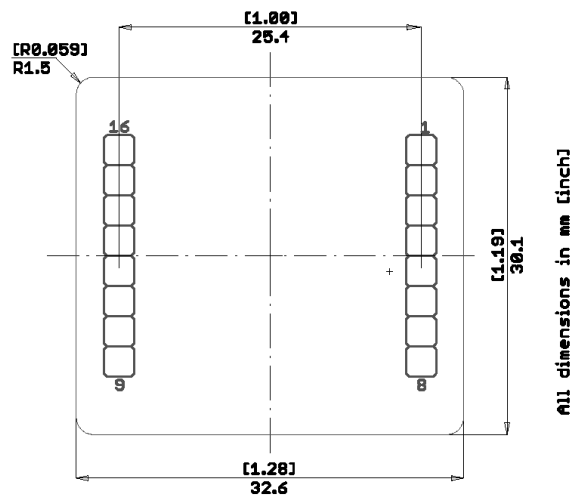

Pin spacing 2.54 mm

ELATEC GmbH

Zeppelinstr. 1
82178 Puchheim • Germany
P +49 89 552 9961 0 • F +49 89 552 9961 129
E-Mail: info-rfid@elatec.com
Website: elatec.com

ELATEC Inc.

4203 SW High Meadows Ave
Palm City • FL 34990 • USA
P +1 772 210 2263 • F +1 772 382 3749
E-Mail: americas-info@elatec.com
Website: elatec.com

ELATEC Technology (Shenzhen) LLC

No. 716 Industrial Bank Tower
Futian District • Shenzhen • China
P/F +86 755 2394 6014
E-Mail: apac-info@elatec.com
Website: elatec.com

ELATEC reserves the right to change any information or data in this document without prior notice. ELATEC declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.