

TWN4 USB FRONT READER

COMPACT LF/HF/NFC RFID READER/WRITER FOR DIRECT CONNECTION TO PRINTER



TWN4 USB Front Reader
Top view (inlay customizable)



TWN4 USB Front Reader
Bottom view (360° mounting possibility)

The TWN4 USB Front Reader integrates RFID (125 kHz and 13.56 MHz), NFC and Bluetooth Low Energy capabilities into a compact but powerful reader. It can be easily connected to an external USB port. Furthermore, it has a rotatable USB interface, which offers a 360° mounting opportunity, as well as a USB-Hub which can optionally be disabled. Its reduced size combined with excellent read/write performance makes it the perfect reader for various applications including but not limited to print solutions, single sign-on.

The TWN4 USB Front Reader allows users to read and write almost all common worldwide 125 kHz and 13.56 MHz tags and/or labels. It supports all major transponders from various suppliers like ATMEL, EM, ST, NXP, TI, HID etc. and ISO standards like ISO14443A/B (T=CL), ISO15693, ISO18092 / ECMA-340 (NFC).

Special features:

- + Multi-frequency RFID reader/writer for 125 kHz, 13.56 MHz, NFC, Bluetooth Low Energy
- + Powerful SDK for writing apps which are executed directly on the reader
- + Encrypted communication (AES128) between card reader and printer available
- + Firmware update in the field possible
- + USB-hub „pass through“ on the front side can be deactivated via device driver
- + USB connector on the rear side can be rotated, which offers the possibility of a 360° mounting
- + Available with custom inlay and packaging as “ready to sell from stock”
- + Onboard 18 kB flash storage, e.g. for storing user accessible non-volatile data
- + Direct chip-commands support
- + One onboard SAM socket (Secure Access Module)
- + CCID and PC/SC 2.01
- + Supports quick (re)configuration over network and over wireless interface with TWN4 CONFIG Card
- + TWN4 Upgrade Card for P and PI options available on request
- + 3D construction data (STEP) available on request



Elevator



EV Chargers



Access



Shop POS



Fitness
Equipment



Ticket POS



PC Log-on



Document
Management



Driver ID



Vending



Parking



Gaming



Locker Locks



Time
Attendance



Industrial
PC

TECHNICAL DATA

FREQUENCY	125 kHz (LF) / 13.56 MHz (HF) / 2.4 GHz (BLE)
ANTENNA	Integrated
HOUSING	Material: ABS UL94-V0, color: black
DIMENSIONS (L X W X H)	60 mm x 39 mm x 16.5 mm / 2.36 inch x 1.54 inch x 0.65 inch
POWER SUPPLY	4.3 V - 5.5 V via USB
CURRENT CONSUMPTION	RF field on: 250 mA typically + 16 mA (BT)
TEMPERATURE RANGE	Operating: 0 °C up to +65 °C (+32 °F up to +149 °F) Storage: -45 °C up to +70 °C (-49 °F up to +158 °F)
RELATIVE HUMIDITY	5% to 95% non-condensing
READ- / WRITE DISTANCE	LF and HF: Up to 45 mm / 1.77 inch, depending on environment and transponder / BT: n/a
OPERATING MODES (USB)	USB keyboard emulation – USB virtual COM port – CCID / PC/SC 2.01
BLUETOOTH LOW ENERGY	Bluetooth V4.1, software upgradable to V4.2; API; standards as GAP, SM, L2CAP, ATT; predefined GATT structure; up to 8 connections; AES128 supported
MTBF	500,000 hours
WEIGHT	Approx. 22 g / 0.78 oz
SUPPORTED TRANSPONDERS (STANDARD) 13.56 MHZ	<p>ISO14443A: LEGIC Advant¹⁾, MIFARE Classic EV1²⁾, MIFARE Classic, MIFARE Mini, MIFARE DESFire EV1, MIFARE DESFire EV2²⁾, MIFARE DESFire Light³⁾, MIFARE Plus S, X, MIFARE Pro X⁴⁾, MIFARE Smart MX⁴⁾, MIFARE Ultralight, MIFARE Ultralight C, MIFARE Ultralight EV1, NTAG2xx, PayPass⁴⁾, SLE44R35, SLE66Rxx (my-d move)⁴⁾, Topaz</p> <p>ISO14443B: Calypso⁴⁾, Calypso Innovatron protocol⁴⁾, CEPAS⁴⁾, HID iCLASS¹⁾, Moneo⁴⁾, Pico Pass⁵⁾, SRI4K, SRIX4K, SRI512, SRT512</p> <p>ISO18092 ECMA-340: NFC Forum Tag 1-5, NFC Peer-to-Peer, Sony FeliCa⁶⁾, NFC Active and passive communication mode</p> <p>ISO15693: EM4x35⁴⁾, HID iCLASS¹⁾, HID iCLASS SE/SR¹⁾, ICODE SLI, LEGIC Advant¹⁾, M24LR16/64, MB89R118/119, SRF55Vxx (my-d vicinity)⁴⁾, Tag-it, PicoPass⁵⁾</p>
SUPPORTED TRANSPONDERS (STANDARD) 125 KHZ ⁷⁾	AWID, Cardax, CASI-RUSCO, Deister ⁸⁾ , EM4100, 4102, 4200 ⁹⁾ , EM4050, 4150, 4450, 4550, EM4305 ¹⁰⁾ , FDX-B ¹⁰⁾ , EM4105, HITAG 1 ¹¹⁾ , HITAG 2 ¹¹⁾ , HITAG S ¹¹⁾ , ICT ¹⁰⁾ , IDTECK, Isonas ¹⁰⁾ , Keri, Miro, Nedap ⁸⁾ , PAC ¹⁰⁾ , Pyramid, Q5, T5557, T5567, T5577, TIRIS/HDX ¹⁰⁾ , TITAN (EM4050), UNIQUE, ZODIAC
SUPPORTED TRANSPONDERS (OPTION P)	All Standard Transponders, Cotag, G-Prox ⁸⁾ , HID DuoProx II, HID ISO Prox II, HID Micro Prox, HID ProxKey III, HID Prox, HID Prox II, Indala, ioProx, Nexwatch
SUPPORTED TRANSPONDERS (OPTION PI)	Requires TWN4 SIO Card, All Standard Transponders, All Option P Transponders, HID iCLASS, HID iCLASS SE/SR/Elite, HID iCLASS SEOS (Facility Code/PAC) ¹²⁾
OS SUPPORT	Windows XP, Vista, Embedded CE ¹⁰⁾ , 7 (32-/64-bit), 8, 8.1, 10, Linux, Android ¹⁰⁾ , iOS ¹⁰⁾ , MAC OS X ¹⁰⁾
PERIPHERAL INTERFACES	Male USB type A, female USB type A, Bluetooth Low Energy (BLE)
TRANSMISSION SPEED	Host: USB Full speed (12 Mbit/s), USB Hub: USB Hi-Speed up to 40 MB/s, HF Air: up to 848 kbit/s, BT Air: up to 100 kbit/s
CERTIFICATION NAME	TWN4 USB Front Reader
CERTIFICATION(S)	ACMA, ANATEL, CE/RED, FCC, IC, REACH and RoHS-III compliant, and many more
ORDER CODE(S)	<p>T4FK-FBFRLM7 Front Reader Kit</p> <p>T4FK-FBFRLM7-P Front Reader-P Kit</p> <p>T4FK-FBFRLM7-PI Front Reader-PI Kit</p>


¹⁾UID only ²⁾r/w enhanced security features on request ³⁾In preparation ⁴⁾r/w in direct chip command mode ⁵⁾UID only, read/write on request ⁶⁾UID + r/w public area

⁷⁾125 kHz technology requires a Russian local test and import license from the ministry of Trade and Industry (MINPROMTORC). This license has to be in place

before Elatec can accept any order to be shipped to Russia ⁸⁾Hash value only ⁹⁾Only emulation of 4100, 4102 ¹⁰⁾On request ¹¹⁾Without encryption ¹²⁾r/w on

request

DRAWING

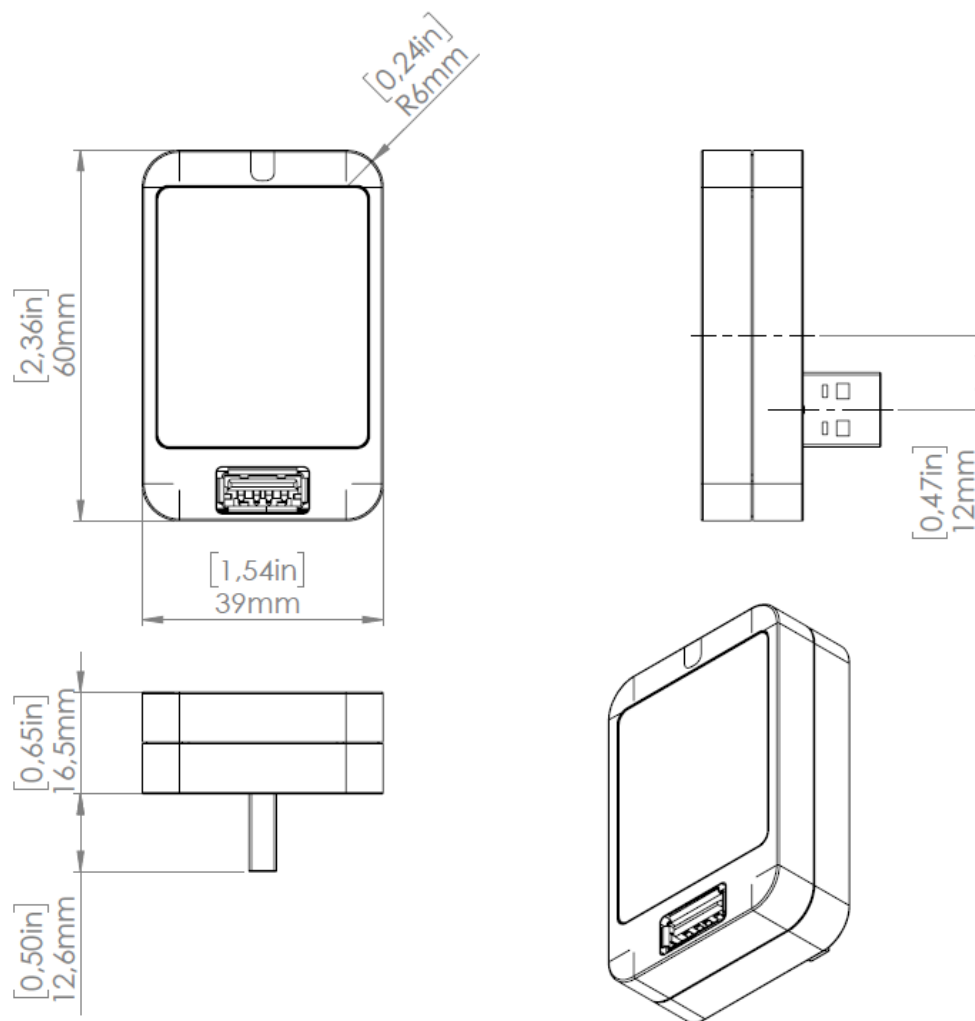

ELATEC GmbH
Zeppelinstr. 1
82178 Puchheim • Germany
P +49 89 552 9961 0 • F +49 89 552 9961 129
E-Mail: info-rfid@elatec.com
Website: elatec.com

ELATEC USA Inc.
4203 SW High Meadows Ave
Palm City • FL 34990 • USA
P +1 772 210 2263 • F +1 772 382 3749
E-Mail: americas-info@elatec.com
Website: elatec.com

ELATEC Technology (Shenzhen) LLC
No. 716 Industrial Bank Tower
Futian District • Shenzhen • China
P/F +86 755 2394 6014
E-Mail: apac-info@elatec.com
Website: elatec.com

ELATEC reserves the right to change any information or data in this document without prior notice. ELATEC declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.