


TWN4 MULTITECH M

MULTI-FREQUENCY RFID MODULE FOR LF, HF, AND NFC

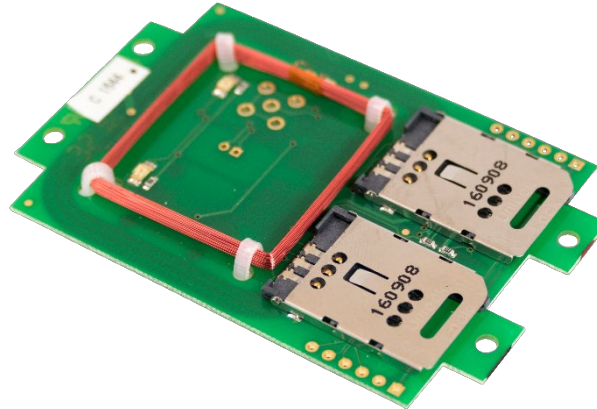

TWN4 MultiTech M
(exemplary illustration)

ELATEC TWN4 family of RFID readers and modules allows users to read and write to almost any 125 kHz and 13.56 MHz tags and/or labels. It supports all major transponders from various suppliers like ATMEL, EM, ST, NXP, TI, HID, LEGIC, etc. and ISO standards like ISO 14443A/B (T=CL), ISO 15693 and ISO 18092 / ECMA-340 (NFC). The new generation is a direct enhancement to the successful TWN3 family as it comes in the same mechanical dimensions (OEM PCB and desktop housing). The readers support host communication via USB or RS-232.

Special features:

- + Possibility to read more than 60 RFID technologies
- + Powerful SDK for writing apps which are executed directly on the module
- + Firmware update in the field possible
- + On-board 18 kB flash storage, e.g. for storing user accessible non-volatile data
- + Supports transparent data exchange between reader and RFID media
- + Two on-board SAM sockets (Secure Access Module)
- + CCID and PC/SC 2.01
- + Dedicated expansion bus for connection of LCD, mass storage, etc.
- + 2 GPIOs
- + Supports quick (re)configuration over network and over wireless interface with TWN4 Config Card
- + TWN4 Upgrade Card for P and PI options available on request



Elevator



EV Chargers



Access



Shop POS



Fitness
Equipment



Ticket POS



PC Log-on



Document
Management



Driver ID



Vending



Parking



Gaming



Locker Locks



Time
Attendance



Industrial
PC

TECHNICAL DATA

FREQUENCIES	125 kHz (LF) / 13.56 MHz (HF)
ANTENNAS	Integrated
DIMENSIONS (L X W X H)	Approx. 76 x 49 x 14 mm / 3.0 x 1.9 x 0.6 inch
POWER	USB: 4.3 V – 5.5 V Connector CNB: 3.3 V ± 5% RS-232: requires 5 V external power supply PS2 classified power source according to IEC 62368-1, short-circuit current < 8 A
CURRENT CONSUMPTION	RF field on: 120 mA typically / Sleep: 500 µA typ.
TEMPERATURE RANGE	Operating: -25 °C up to +80 °C (-13 °F up to +176 °F) Storage: -40 °C up to +85 °C (-40 °F up to +185 °F)
RELATIVE HUMIDITY	5% to 95% non-condensing
READ/WRITE DISTANCE	Up to 100 mm / 4 inch, depending on environment and transponder
OPERATING MODES (USB)	USB keyboard emulation – USB virtual COM port – CCID / PC/SC 2.01
MTBF	500,000 hours
WEIGHT	Approx. 12 g / 0.43 oz (without cable)
OS SUPPORT	Windows 7 (32-/64-bit) and higher versions, Linux, Android ¹⁾ , iOS ¹⁾ , MAC OS X ¹⁾
PERIPHERAL INTERFACES	USB, RS-232, TTL serial (logic level 3.3 V, CMOS, 5 V tolerant), I ² C, 2 GPIOs, Clock/Data, Wiegand D0/D1, 2 SAM slots
TRANSMISSION SPEED	USB full speed (12 Mbit/s), RS-232: up to 115,200 baud, HF Air: up to 848 kbit/s
CERTIFICATION NAME	TWN4 MultiTech M
CERTIFICATIONS	Non-exhaustive list ²⁾ : CE/RED, FCC, IC, REACH and RoHS-III compliant
ORDER CODES	T4DO-F Reader module, standard configuration T4DO-F-P Reader module with P option T4DO-F-PI Reader module with PI options


¹⁾On request ²⁾The product has been certified for a use in many countries and regions. Contact your Sales representative for detailed information about all certifications and approvals granted to the product.

SUPPORTED TRANSPONDERS¹⁾

<p>SUPPORTED TRANSPONDERS (STANDARD) 13.56 MHZ</p>	<p><u>ISO 14443A:</u> LEGIC Advant²⁾, NTAG2xx, MIFARE Classic, MIFARE Classic EV1³⁾, MIFARE DESFire EV1, MIFARE DESFire EV2⁴⁾, MIFARE DESFire EV3⁴⁾, MIFARE DESFire Light⁴⁾, MIFARE Mini, MIFARE Plus S, MIFARE Plus X, MIFARE Smart MX⁵⁾, MIFARE Ultralight, MIFARE Ultralight C, MIFARE Ultralight EV1³⁾, SLE44R35⁵⁾, SLE66Rxx (my-d move)⁵⁾, Topaz</p> <p><u>ISO 14443B:</u> Calypso⁵⁾, Calypso Innovatron protocol⁵⁾, CEPAS⁵⁾, CTS, Pico Pass²⁾, SRI4K, SRI512, SRIX4K, SRT512</p> <p><u>ISO 15693:</u> EM4x33⁵⁾, EM4x35⁵⁾, ICODE SLI, LEGIC Advant²⁾, M24LR16/64, Pico Pass²⁾, SRF55Vxx (my-d vicinity)⁵⁾, Tag-it</p> <p><u>ISO 18092 / ECMA-340:</u> NFC Forum Tag 1-5, Sony FeliCa⁶⁾</p> <p><u>LEAF Identity:</u> LEAF⁷⁾</p>
<p>SUPPORTED TRANSPONDERS (STANDARD) 125 KHZ⁸⁾</p>	<p>AWID, Cardax⁹⁾, CASI-RUSCO, Deister⁹⁾, EM4050, EM4100, EM4102, EM4150, EM4200¹⁰⁾, EM4305, EM4450, EM4550, HITAG 1¹¹⁾, HITAG 2¹¹⁾, HITAG S¹¹⁾, ICT, IDTECK, ISONAS, Keri, Miro, Nedap⁹⁾, Pyramid, Q5, T5557, T5567, T5577, TITAN (EM4050), UltraProx, UNIQUE, ZODIAC</p>
<p>SUPPORTED TRANSPONDERS (P OPTION)</p>	<p>All standard transponders, G-Prox⁹⁾, HID 1326 Prox II, HID 1336 DuoProx II, HID 1346 ProxKey III, HID 1386 ISO Prox II, HID 1391 Micro Prox, HID Prox, Indala, ioProx, Nexwatch</p>
<p>SUPPORTED TRANSPONDERS (PI OPTIONS)¹²⁾</p>	<p>All standard transponders, all P option transponders, HID MIFARE Classic SE, HID MIFARE DESFire SE, HID SEOS, HID iCLASS Legacy/SR/SE</p>

¹⁾Unless otherwise agreed with ELATEC, the product is delivered with a standard firmware version that might be older than the latest firmware developed by ELATEC. This firmware version can be changed using the ELATEC AppBlaster tool. Please note that the information given in this document regarding the transponder technologies supported by the product is based on the latest firmware version. ²⁾UID only ³⁾r/w enhanced security features on request ⁴⁾Supported as part of the EV1 downward compatibility ⁵⁾r/w in transparent data exchange mode ⁶⁾UID + r/w public area ⁷⁾AV2 only, requires one free SAM slot for MIFARE SAM AV2 card ⁸⁾125 kHz technologies require a Russian local test and import license from the ministry of Trade and Industry (MINPROMTORC). This license has to be in place before ELATEC can accept any order to be shipped to Russia. ⁹⁾Hash value only ¹⁰⁾Only emulation of 4100, 4102 ¹¹⁾Without encryption ¹²⁾Requires one free SAM slot for HID iCLASS SE processor.

TECHNICAL DRAWINGS

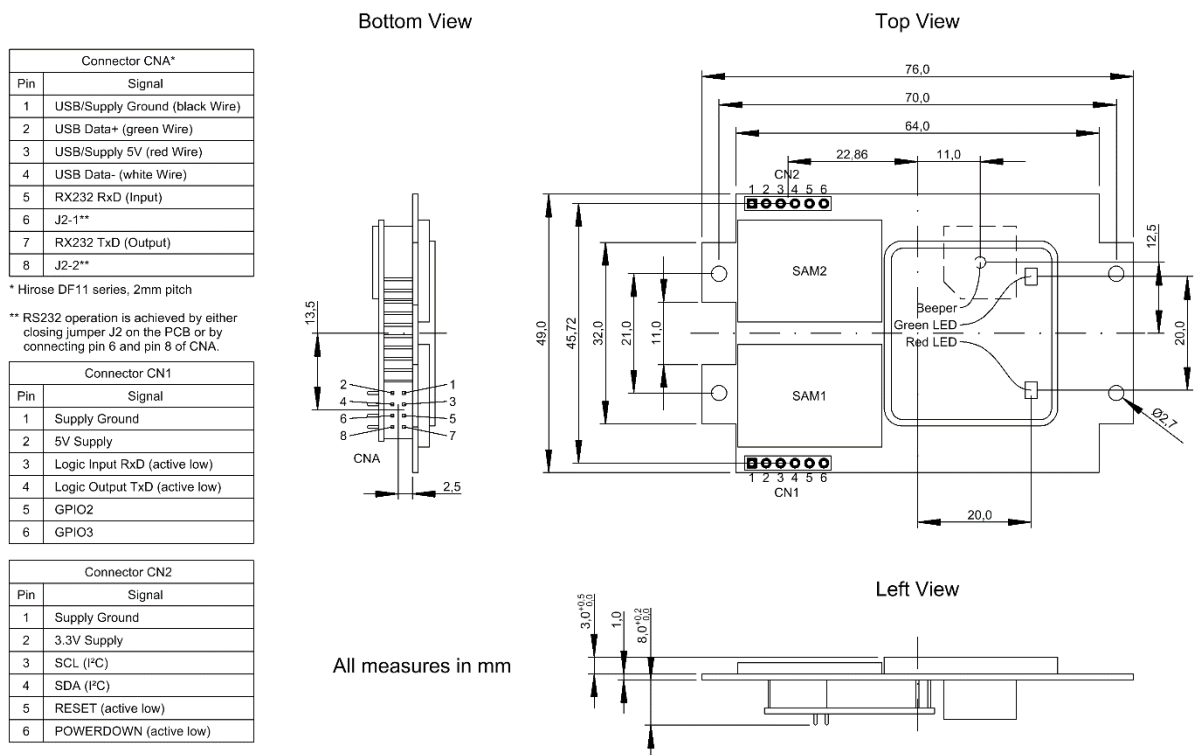

ELATEC GmbH
 Zeppelinstr. 1
 82178 Puchheim
 Germany
 P +49 89 552 9961 0
 F +49 89 552 9961 129
 E-Mail: info-rfid@elatec.com
 Website: elatec.com

ELATEC Systems GmbH
 Schwieberdinger Str. 44
 71636 Ludwigsburg
 Germany
 P +49 7141 309736 0
 E-Mail: info-rfid@elatec.com
 Website: elatec.com

ELATEC Inc.
 1995 SW Martin Hwy
 Palm City • FL 34990
 USA
 P +1 772 210 2263
 F +1 772 382 3749
 E-Mail: americas-info@elatec.com
 Website: elatec.com

ELATEC Technology (Shenzhen) LLC
 918, Main Building, Tian An Cyber Times
 Tower, No. 6, Tairan Fourth Road, Tian 'an
 Community, Shatou Neighborhood
 Futian District • Shenzhen • China
 P/F +86 755 2394 6014
 E-Mail: apac-info@elatec.com
 Website: elatec.com

ELATEC reserves the right to change any information or data in this document without prior notice. ELATEC declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.