



DEVELOPMENT KIT

FOR TWN4 MULTITECH NANO AND NANO LEGIC 42

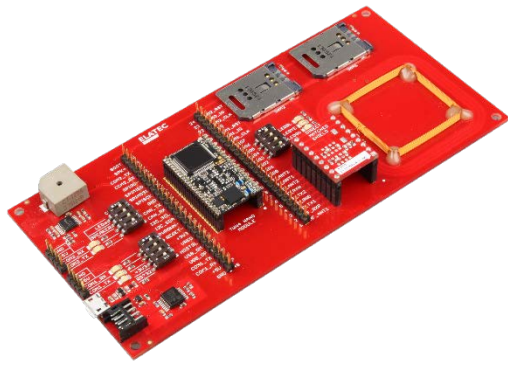

Development Board for
TWN4 MultiTech Nano

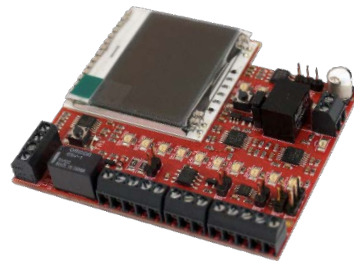

I/O Extender for
Development Board

The TWN4 MultiTech Nano is a device for reading and writing RFID transponders. It can communicate with a large number of transponder types in the frequency ranges of 125 kHz, 134.2 kHz and 13.56 MHz.

The TWN4 MultiTech Nano module Development Board provides ready-to-use interfaces (USB and UART) and peripherals (Low-/High-frequency antennas, SAM Card slots) needed to test the core functionalities of the Nano module. In addition, an I/O Extender is offered with a circuitry allowing interaction with CAN, RS-422/485 and Wiegand interfaces. Furthermore a LCD graphic display (over SPI interface) is contained for applications requiring greater degree of user-interaction as well as for debug purposes.

The I/O Extender also offers a generic Clock/Data port, driven through the GPIO of the TWN4 MultiTech Nano Module. This generic port can be used to send/receive data in OMRON, Wiegand and other custom formats.

Package contents:

- + Development Board
- + TWN4 MultiTech Nano C1 or TWN4 MultiTech Nano LEGIC 42 C1
- + Micro USB cable
- + Lever for TWN4 MultiTech Nano/Nano LEGIC 42
- + 2 x sample tags 125 kHz
- + 2 x sample tags 13.56 MHz

Optional accessory:

- + I/O extender



Elevator



EV Chargers



Access



Shop POS



Fitness
Equipment



Ticket POS



PC Log-on



Document
Management



Driver ID



Vending



Parking



Gaming



Locker Locks



Time
Attendance



Industrial
PC

OVERVIEW

DEVELOPMENT BOARD

Dimensions of the development board: 154.94 mm x 73.66 mm [6.1 inch x 2.9 inch]

*Dimensions of the antenna shield: 22.86 mm x 17.78 mm [0.9 inch x 0.7 inch]

I/O EXTENDER

ORDER CODES

T4NK-F-PI	Development Kit TWN4 MultiTech-PI Nano (USB cable, transponders: MIFARE, 125 kHz read only)
T4NM-FDC0	TWN4 MultiTech Nano C0; Direct matched
T4NM-FDC0-P	TWN4 MultiTech-P Nano C0; Direct matched
T4NM-FDC0-PI	TWN4 MultiTech-PI Nano C0; Direct matched
T4NM-FDC1	TWN4 MultiTech Nano C1; Direct matched
T4NM-FDC1-P	TWN4 MultiTech-P Nano C1; Direct matched
T4NM-FDC1-PI	TWN4 MultiTech-PI Nano C1; Direct matched
T4NK-B-P	Development Kit TWN4 MultiTech-P Nano LEGIC 42 (USB cable, transponders: MIFARE, 125 kHz read only)
T4NM-B5C0	TWN4 MultiTech Nano LEGIC 42 C0; 50 Ohm
T4NM-B5C0-P	TWN4 MultiTech-P Nano LEGIC 42 C0; 50 Ohm
T4NM-B5C1	TWN4 MultiTech Nano LEGIC 42 C1; 50 Ohm
T4NM-B5C1-P	TWN4 MultiTech-P Nano LEGIC 42 C1; 50 Ohm
T4ND-SX	I/O Extender

ELATEC GmbH • Zeppelinstr. 1 • 82178 Puchheim • Germany
 P +49 89 552 9961 0 • F +49 89 552 9961 129 • E-Mail: info-rfid@elatec.com
 elatec.com



Elatec reserves the right to change any information or data in this document without prior notice. Elatec declines all responsibility for the use of this product with any other specification but the one mentioned above. Any additional requirement for a specific customer application has to be validated by the customer himself at his own responsibility. Where application information is given, it is only advisory and does not form part of the specification. Disclaimer: All names used in this document are registered trademarks of their respective owners.